




LWB BEARING PRODUCTION CO., LTD.

75 mm x 95 mm x 10 mm NTN 6815LLB deep groove ball bearings

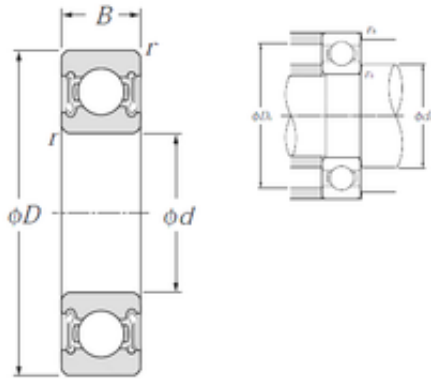

Bearing No. 6815LLB

6815LLB Bearing 2D drawings and 3D CAD models

Size	75x95x10 mm
Bore Diameter	75 mm
Outer Diameter	95 mm
Width	10 mm
d	75 mm
D	95 mm
B	10 mm
C	10 mm
r min.	0,6 mm
da min.	79 mm
da max	80 mm
Da max.	91 mm
ra max.	0,6 mm
Weight	0,145 Kg
Basic dynamic load rating (C)	12,5 kN
Basic static load rating (C0)	12,9 kN
(Grease) Lubrication Speed	6 400 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359586084
Product Group	B00308
Enclosure	2 Seals



LWB BEARING PRODUCTION CO., LTD.

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	75MM Bore; 95MM Outside Diameter; 10MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.317
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	3.74 Inch 95 Millimeter
Bore	2.953 Inch 75 Millimeter
bore diameter:	75 mm
precision rating:	ISO Class 0



LWB BEARING PRODUCTION CO., LTD.

outside diameter:	95 mm
finish/coating:	Uncoated
overall width:	10 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	10 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	10 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	6400 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	6400 RPM
dynamic load capacity:	12500 N
series:	68
static load capacity:	12900 N
manufacturer product page:	Click here